




Ask us about our product handling equipment which will allow you to print on cartons in the flat

STC 11

The aps STC 11 is the simplest solution for the printing of basic information such as

- product name
- date / time
- julian date
- expiration date
- counter
- repeat print



on porous substrates.

Compact and easy to install, STC 11 will fit perfectly in most secondary packaging production environments. Its intuitive menu requires little skill and training to operate successfully.

STC 11 benefits from all the key benefits brought by the cartridge concept:

- high resolution printing,
- no maintenance,
- simplicity of use.



3175 Princeton Pike
Lawrenceville, NJ 08648
(609) 912-0145



www.nutecsystems.com



Authorized Distributor of APS
Products in North America

STC 11 FEATURES

PHYSICAL CHARACTERISTICS

Number of heads	1 print head
Printer dimensions	227 mm x 118 mm x 111 mm (l x w x h)
Mounting bracket dimension	375 mm vertical and 225 mm horizontal
Printer Weight	2 kg
Length of data cables	Option: detachable head with 1m cable
Display	60 x 80 pixels, 56 x 30 mm, LCD backlit monochrome with auto-switch



PRINTING FEATURES

Print resolution	300 dpi (adjustable to 600 dpi)
Print height	5 - 12.7mm
Print speed	Up to 60 m / min (programmable)
Message length	30 characters per line with full height. Can be increased with special functions
Type of information	Date codes, time codes, expiration dates, Counter, Repeat print, logo (1 down- loadable via RS485)
Font style	Alpha (upper and lower case) / Numeric characters, selected Katakana characters
Ink throw distance	3mm

ENVIRONMENT


Electrical Power Supply	85 VAC to 240 VAC
Frequency	47 Hz to 63 Hz Auto-Switch
Power	65 Watts (maximum)
Humidity	10-80%
Operating temperature	5-40C

OPERATIONAL CAPABILITIES

Print go / start inputs	1 adjustable reflex type sensing
Message storage capability	100 message memory with 30 full height character max per message. More with 2 line text.
Software adjustments	Programmable print delay, adjustable character width & height, adjustable dot density, programmable print direction, programmable line speed
Alarm	Ready / alarm indicator (visual & audio)
Languages	Menus in English, Spanish, French, German & Japanese

INK COMPATIBILITIES

Standard Ink	Porous
--------------	--------

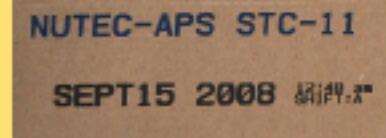

NUTEC
SYSTEMS, INC.

3175 Princeton Pike
Lawrenceville, NJ 08648
609) 912-0145
www.nutecsystems.com

aps
Alternative Printing Services

Authorized Distributor of APS
Products in North America